



PRODUCT DATA SHEET

790 SPRAY ADHESIVE (AEROSOL)

Description

EAL 790 Spray Adhesive is a premium grade pressure sensitive contact adhesive which has been specially formulated for fast strong bonding on a variety of surfaces.

Compatible Substrates

- Foam
- Rubber (pretest)
- Plastics (pretest)
- Metal
- Fibreglass
- Textiles
- Fabrics
- Cardboard
- Wood
- Cork


Typical Properties

Appearance	Clear opaque liquid
Tack Time	Up to 3 minutes
Cure Time	2-3 hours
Flash Point	< 0°C
Solvent	Hydrocarbon
Propellant	Hydrocarbon
UN No.	1950
DG Class	2.1

Directions for Use

Ensure surfaces are clean, dry and free of contaminants such as dust, oil and grease.

Shake can well before use. Hold can in an upright position at a distance of 20-30cms and spray both surfaces evenly in a side to side motion. Allow to tack for 30 seconds to 3 minutes (depending on weather conditions) then press and hold parts together. When finished invert the can and spray for 2-3 seconds to clear nozzle. Overspray can be removed with mineral turpentine.

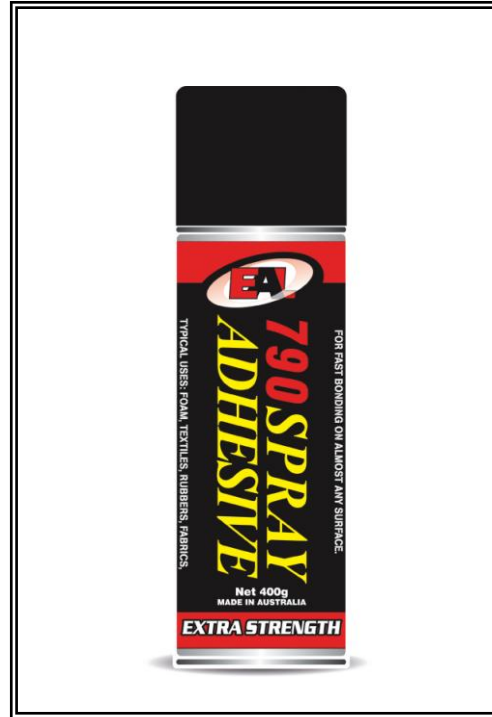

Note

The data contained herein is offered in good faith based upon information that is believed to be accurate and reliable, but no warranty, express or implied, regarding the accuracy of such information is made. The conditions or methods of handling, storage, use and disposal of this product are beyond our control and may be beyond our knowledge. For this and other reasons, we do not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of this product. It is the responsibility of the user to determine this products suitability for their intended purpose.

**For safe handling information please see
Safety Data Sheet (SDS).**

Packaging

400g Aerosol
12 x 400g cans per carton
Part No. 790SA400

Contact Us

Engineering Adhesives & Lubricants (Aust)
Pty Ltd
Tel: (07) 5531-4242 | Fax: (07) 5531-4243
Email: info@eal.com.au
Website: www.eal.com.au



www.eal.com.au