



VC-3 Tape is a unique patent pending anti-vibration compound designed to prevent fastener loosening. Applied to the threads of a fastener and installed into a mating part; VC-3 Tape is ready for immediate use with no drying or curing time required. Unlike typical threadlockers, VC-3 Tape can be post assembly adjusted, removed, and re-used up to 3 times.



No cure time required. Simply apply to fasteners and install into mating part and use.



Adjust, remove and re-use as needed. Fasteners stay put under vibration but are easily removed with hand tools.



Works on nearly any substrate. Does not require active metals or primers like a traditional threadlocker.



Clean fastener by removing dirt and oil



Tightly wrap and stretch VC-3 Tape around fastener 1.5 to 2 revolutions at the area of engagement



Install into mating part. Ready for immediate use.

# VC-3® TAPE INSTANT VIBRATION LOCKER

VC-3 Tape is not an adhesive or a traditional threadlocker. It is a "one of a kind" material which absorbs vibrational stress within a joint, thus preventing the loosening of fasteners.

## **Industrial Applications**

- MRO
- Assembly Lines
- Heavy Equipment
- · Machine Guarding
- HVAC
- NAT Gas Sealing


## Consumer Applications

• Lawn equipment

Playground

- Firearms/Archery
- Furniture/Cabinetry
- Threaded Pipes
- Household Items

### Vibration Comparison\*

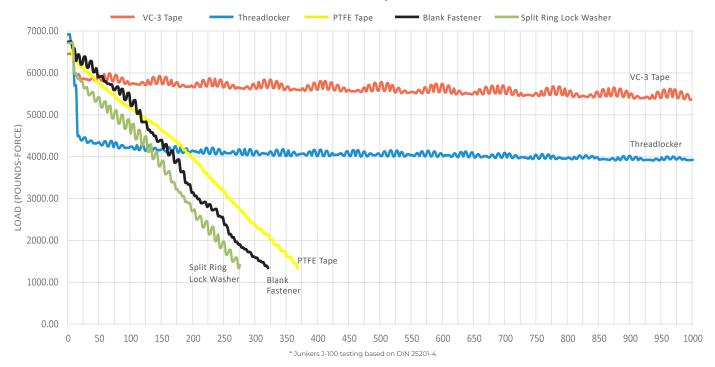

## VC-3 Tape vs Traditional Anaerobics

Liquid anaerobics cure to a hard/rigid thermoset plastic which can crack under vibration, be difficult to remove, and damage plastics. VC-3 Tape is compatible with all plastics / metals and exhibits a continous resistance to movement allowing for easy adjustment and removal.

#### VC-3 Tape vs PTFE Tape

PTFE tape does not prevent loosening. VC-3 Tape however will provide an excellent seal on threaded piping systems for natural gas and non-potable water while preventing the piping from loosening.

VC-3 Tape is available in rolls sized 0.625 inch X 60 inches. Product number 23805BC.