



## PRODUCT DATA SHEET

### BRIGHT GAL® (AEROSOL)

#### DESCRIPTION

**EAL BRIGHT GAL®** is fast drying anti-corrosive surface coating that has been fortified with 98.5% pure metallic zinc. It closely matches the appearance of hot dip galvanizing and can be used as an anti-corrosive primer and top coat in one application. In the most severe and/or highly corrosive conditions it may be primed with EAL Zinc Gal® for additional long term protection.

#### TYPICAL APPLICATIONS

Cosmetic touch-up and repair of previously galvanized surfaces including:


- Handrails
- Fences & gates
- Guardrails
- Pipes
- Heavy Equipment
- Weld Areas

#### TYPICAL PROPERTIES

Colour	Silver
Specific Gravity	1.32
Volatiles	> 60%
Coverage	Up to 2 sq mtrs per 400g can
Touch Dry @ 20°C	5-10 min

#### DIRECTIONS FOR USE

1. Surface to be treated must be totally free of rust, dirt, oil etc. If necessary sandblast or clean with sandpaper.
2. Shake can vigorously until agitator ball is free and continue shaking thereafter for a further 1 minute.
3. Holding can upright, spray  $\pm$  20cm away from surface using smooth even strokes. To prevent paint running or sagging do not spray too heavily or too close to the surface. Repeat as necessary allowing time for drying between each coat.
4. Invert can and spray to clear nozzle after use.

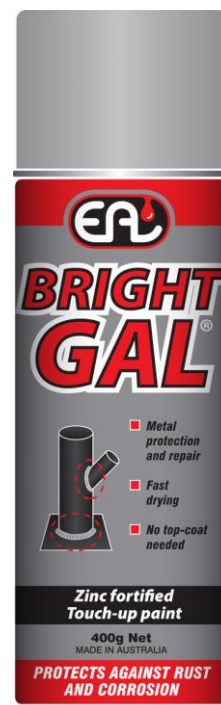



## PRODUCT DATA SHEET

### BRIGHT GAL® (AEROSOL)

#### **HANDLING AND STORAGE**

- Store under cover below 50°C and away from direct sunlight.
- Contents under pressure.
- Do not smoke.
- Do not puncture or incinerate can, even when empty.
- Keep out of reach of children.
- Read directions on product label before use.

**For additional safe handling information please see Safety Data Sheet (SDS).**

#### **PACKAGING**

400g Aerosol  
12 x 400g cans per carton  
Part No. GALBR400

#### **NOTE**

The data contained herein is offered in good faith based upon information that is believed to be accurate and reliable, but no warranty, express or implied, regarding the accuracy of such information is made. The conditions or methods of handling, storage, use and disposal of this product are beyond our control and may be beyond our knowledge. For this and other reasons, we do not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of this product. It is the responsibility of the user to determine the products suitability for their intended purpose.

#### **CONTACT US**

Engineering Adhesives & Lubricants (Aust)  
Pty Ltd

Tel: (07) 5531-4242 | Fax: (07) 5531-4243

Email: [info@eal.com.au](mailto:info@eal.com.au)

Website: [www.eal.com.au](http://www.eal.com.au)